


# 96" Tall Utility Cabinet with Separate Toe Kick Base

## PARTS LIST

ASMBLY-UTLY-96

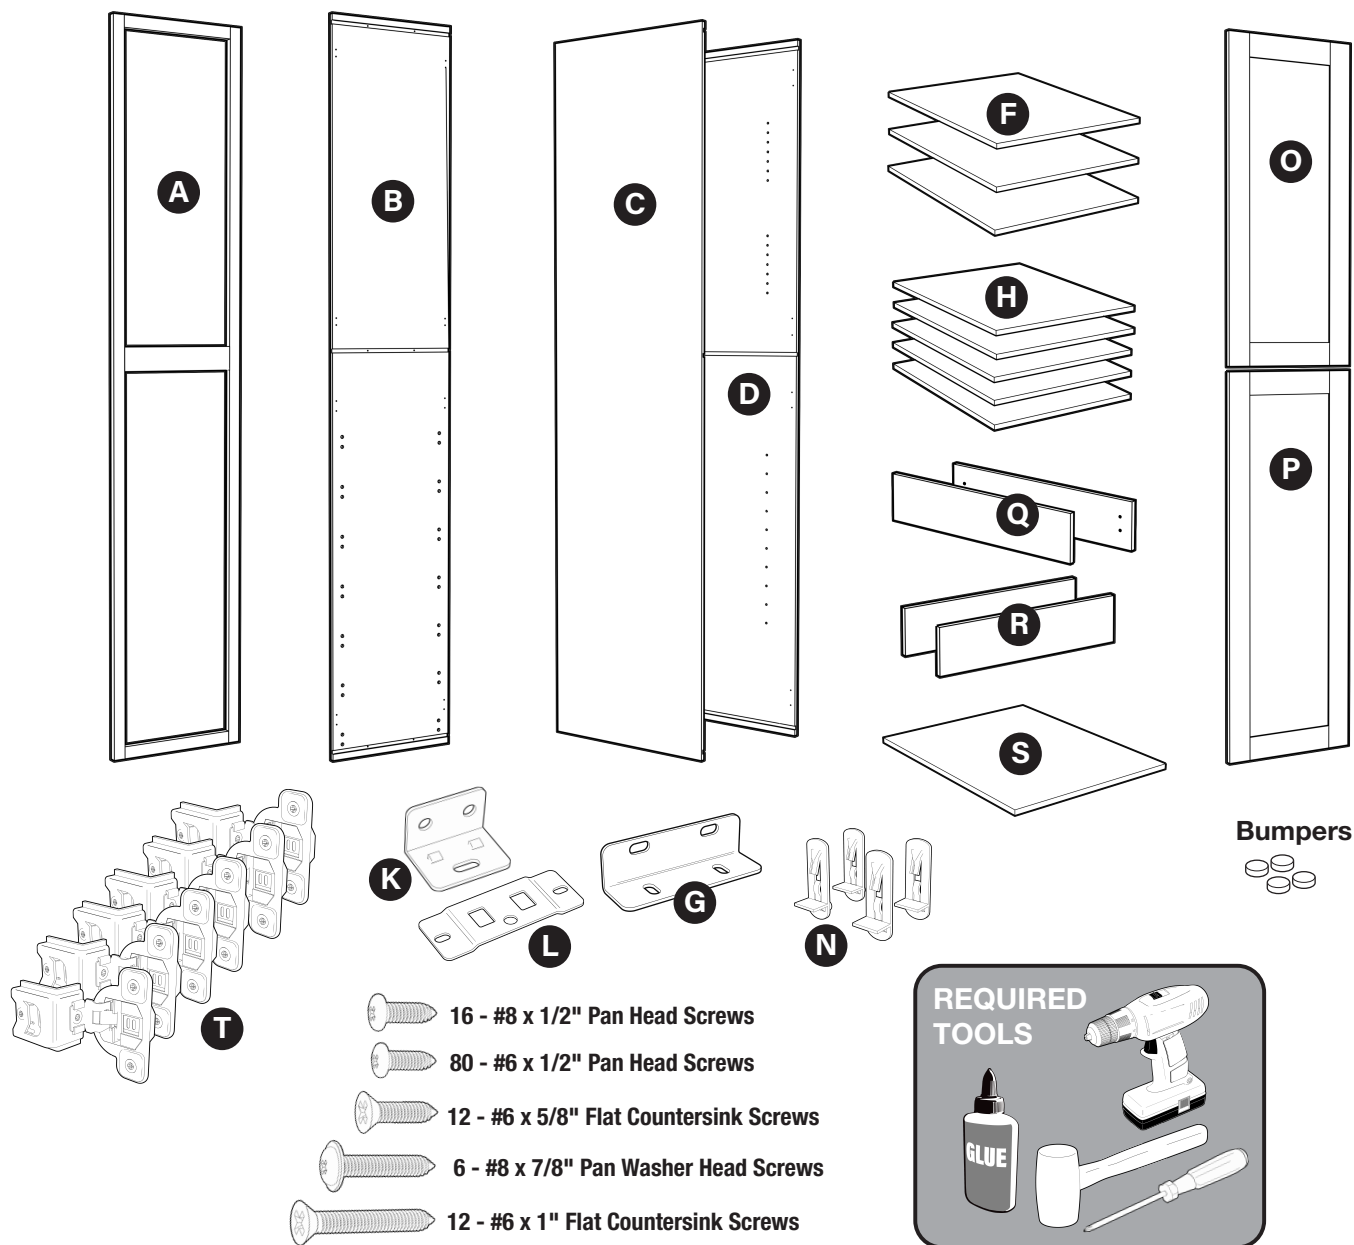

## PARTS LIST

- |                                  |  |
|----------------------------------|--|
| <b>A</b> 1 x Face Frame          | <b>L</b> 16 x Tan RTA Connector Plates |
| <b>B</b> 1 x Back Panel          | <b>N</b> 20 x Locking Shelf Rests      |
| <b>C</b> 1 x Left End Panel      | <b>O</b> Upper door                    |
| <b>D</b> 1 x Right End Panel     | <b>P</b> Lower Door                    |
| <b>F</b> 3 x Fixed Shelves       | <b>Q</b> 2 x Toe Base Sides            |
| <b>G</b> 4 x 2-1/2" L-Brackets   | <b>R</b> 2 x Toe Base Front/Back       |
| <b>H</b> 5 x Adjustable Shelves  | <b>S</b> 1 x Toe Base Top              |
| <b>K</b> 16 x Tan RTA L-Brackets | <b>T</b> 6 x Hinges                    |


### IMPORTANT NOTES:

Before you start assembly, inspect all panels and hardware to ensure you have everything needed. In addition to the tan RTA Connector Brackets supplied, we recommend you run a bead of white wood glue into each groove as you assemble, to create the strongest cabinet. We also recommend laying the panels on some cardboard to protect the finish when assembling.

# BASIC ASSEMBLY INSTRUCTIONS

For step by step assembly instructions scan the QR code or visit:

[www.AssemblySheet.com](http://www.AssemblySheet.com)

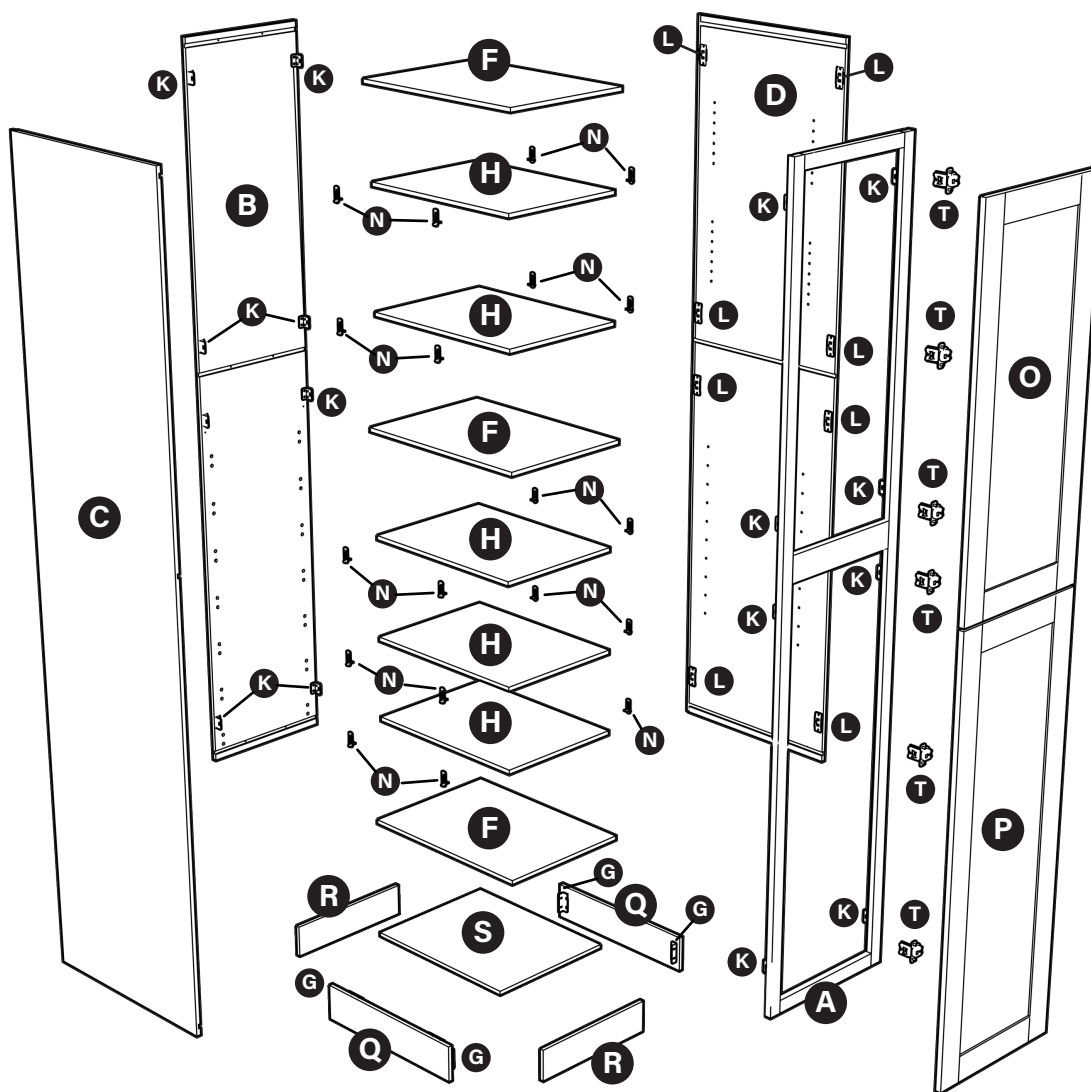

## CABINET ASSEMBLY STEPS

1. Lay Frame (A) face down on a flat smooth surface and install (8) tan L-Brackets (K) using (16) #6 x 1/2" Pan Head screws
2. Place Back Panel (B) on a flat smooth surface and install (8) tan L-Brackets (K) using (16) #6 x 1/2" Pan Head screws
3. Place End Panels (C and D) on a flat smooth surface and install (16) x tan Connector Plates (L) using (32) #6 x 1/2" Pan Head screws
4. Run a bead of wood glue in all the grooves in the back of Frame (A) and insert End Panels (C and D) so that L-Brackets (K) and Connector Plates (L) snap together. Align the panels and secure the Connector Plates with locking screws: (8) #6 x 1/2" Pan Head
5. Run a bead of wood glue and slide (3) Fixed Shelves (F) into grooves in End Panels (C and D) and back of Frame (A)
6. Apply beads of wood glue to recesses in back of End Panels (C and D) and horizontal grooves in Back Panel (B). Carefully align Back Panel (B) with recesses in End Panels (C and D), so that L-Brackets (K) and Connector Plates (L) snap together. Ensure Fixed Shelves (F) fit fully into grooves in Back Panel (B)
7. Carefully turn the cabinet over, make sure it is square and secure the Connector Plates with locking screws: (8) #6 x 1/2" Pan Head screws
8. Turn the cabinet over again, check it is square and insert (6) #6 x 1" Flat Head screws thru holes in Back Panel (B). Tighten screws into Fixed Shelves (F)
9. Insert (4) Locking Shelf Rests (N) in desired locations and install Adjustable Shelves (H)
10. Lay the Doors (O and P) face down on a smooth flat surface and install Hinges (T) using #6 x 5/8" Flat Head screws
11. Attach Upper Door (O) the Face Frame (A) using #8 x 7/8" Pan Washer Head screws and install (2) Clear Bumpers
12. Attach Lower Door (P) the Face Frame (A) using (3) #8 x 7/8" Pan Washer Head screws and install (2) Clear Bumpers

## TOE BASE ASSEMBLY

1. Lay (2) Toe Base Sides (Q) face down on a flat surface and install (4) silver L-brackets (G) using (8) #8 x 1/2" Pan Head screws
2. Lay (1) Toe Base Front/Back panel on a flat surface and attach (2) Toe Base Sides (Q) using (4) #8 x 1/2" Pan Head screws
3. Lay remaining Toe Base Front/Back panel on a flat surface and attach it to the Toe Base Sides (Q) using (4) #8 x 1/2" Pan Head screws
4. Place the Toe Base Top panel between the sides so they overlap the Front/Back panels and secure in place with (6) #6 x 1" Flat Head screws